

EL394878552US

08-07-00

A

Application Transmittal

Customer No. 20350

TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
(415) 576-0200

ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231

08/03/00
JC891 U.S. PTO

Attorney Docket No. 17376-5-1US

"Express Mail" Label No. EL394878552US

Date of Deposit: August 3, 2000

By: Julie Taylor Clough

09/03/00
JC639 U.S. PTO

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☐ patent application of
- ☒ continuation patent application of
- ☐ divisional patent application of
- ☐ continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Dave Leahy, et al.

For: SCALABLE VIRTUAL WORLD CHAT CLIENT-SERVER SYSTEM

- ☒ This application claims priority from of the following Application No./filing date:
08/747,420, filed November 12, 1996, the disclosure of which is incorporated by reference.
- ☒ Please amend this application by adding the following before the first sentence: "This application is a ☒ continuation
08/747,420, filed November 12, 1996, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ 33 page(s) of specification
- ☒ 2 page(s) of claims
- ☒ 1 page of Abstract
- ☒ 5 sheet(s) of ☐ formal ☒ informal drawing(s).
- ☒ A copy of the assignments of the invention previously recorded in the parent application.
- ☒ A ☒ signed ☐ unsigned Declaration [from the parent application].
- ☒ Information Disclosure Statement under 37 CFR 1.97 [without ref. as filed in the parent application].
- ☒ Verified Statement Claiming Small Entity was previously filed in the parent application.
- ☒ Petition for Filing Patent Application by Assignee When A Joint Inventor Refuses to Sign [from parent].
- ☒ Communication Changing Inventor's Name [from parent application].

PLEASE DO NOT CHARGE THE FILING FEE AT THIS TIME

No. extra copies of this sheet are enclosed.

Telephone: (415) 576-0200
Facsimile: (415) 576-0300

Respectfully submitted,
TOWNSEND and TOWNSEND and CREW LLP

Daniel D. Tagliaferri
Reg. No.: 43,178
Attorneys for Applicant

PATENT APPLICATION

SCALABLE VIRTUAL WORLD CHAT CLIENT-SERVER SYSTEM

Inventors:

Dave Leahy
a US citizen
6056 Romany Road
Oakland, CA 94618

Judith Challinger
a US citizen
244 Northrop Place
Santa Cruz, CA 95060

B. Thomas Adler
a US citizen
510 Third Street, Suite 530
San Francisco, CA 94107

S. [Mitra] Ardon
a US citizen
1056 Noe
San Francisco, CA 94114

Assignee:

Worlds Inc.
a Delaware corporation
605 Market Street, 14th Floor
San Francisco, CA 94105

Entity: SMALL

TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, CA 94111-3834
Telephone: (415) 576-0200

SCALABLE VIRTUAL WORLD CHAT CLIENT-SERVER SYSTEM

5

BACKGROUND OF THE INVENTION

The present invention relates to the field of packet communications. More specifically, in one embodiment the invention provides an efficient communications network for client-server networks with large numbers of clients.

10

A client-server network is a network where one or more servers are coupled to one or more clients over a communications channel. Typically, each server and each client is assigned an address so that each can determine which network messages are directed to it. While such a system may have only one server, it typically has many clients. A server object is one which waits for a request from a client object and then performs some service in response to the client request. A client is an object that makes the request. The designation of a particular object (computer hardware and/or software process) as a "server" object or a "client" object is not fixed. Thus, a given object can be a server for some services and a client of other services.

15

20

A typical computer network has one or more file and print servers with a number of clients, where the clients are the desktop computers or workstations of the computer users, all coupled to a high-speed network cable. Client-server communications in such a network are easily handled for several reasons. When clients are not all communicating with the server at once the server need not be designed to handle all the clients at one time. Another reason is that the network traffic is much less than the network capacity furthermore, the clients in a typical computer network need not necessarily be communicating in real-time with the server. However, where many client machines or processes are communicating with each other in real-time through the server, several problems arise.

25

30

35

For example, where a client-server system is used for real-time exchange of information, such as a distributed virtual reality network where users at client machines visually and aurally interact with other users at other client machines, communication is much more difficult, especially where the information is high-bandwidth data such as audio streams, graphic images and image streams. One application of such a client-server system is for game playing, where the positions and actions of each user need to be communicated between all the players to inform each client of the state changes (position, actions, etc.) which occurred at the other clients. The server might maintain global state information and serve as a data server for the clients as they request visual, program and other data as the game progresses.

Some game systems use a peer-to-peer architecture. In a peer-to-peer architecture, a copy of the data which is common to all clients is kept by the client and information which needs to pass between clients is broadcast over the network. This limits the number of clients which can be connected to the network, because the number of messages passing between clients is on the order of the square of the number of clients. With true broadcasting, one message is sent and all clients listen for it, but not all network topologies can handle broadcasts. Where less than all the clients are participating in a game, for example, messages cannot be broadcast because there are clients which should not be receiving the broadcast message. Instead, the broadcast between the players is handled by generating one message to each player client.

This architecture is further limited where the network is not a dedicated network, but is an open network, such as the Internet. As used herein, the term "Internet" refers to the global inter-network of networks which communicates primarily using packets sent according to TCP/IP (Transport Control Protocol/Internet Protocol) standards well known in the art of computer intercommunication. With Internet communications, true broadcasting is not even possible because the network's extent is not known or fixed.

Thus, messages to all players must be sent as separate messages. An additional problem with Internet communications is that packet delivery is not guaranteed nor is it even as reliable as a dedicated network.

Therefore, what is needed is an efficient system for communication between many client systems over dedicated or open networks to provide graphical interaction between users operating the client systems.

SUMMARY OF THE INVENTION

The present invention provides a highly scalable architecture for a three-dimensional graphical, multi-user, interactive virtual world system. In a preferred embodiment a plurality of users interact in the three-dimensional, computer-generated graphical space where each user executes a client process to view a virtual world from the perspective of that user. The virtual world shows avatars representing the other users who are neighbors of the user viewing the virtual word. In order that the view can be updated to reflect the motion of the remote user's avatars, motion information is transmitted to a central server process which provides positions updates to client processes for neighbors of the user at that client process. The client process also uses an environment database to determine which background objects to render as well as to limit the movement of the user's avatar.

A further understanding of the nature and advantages of the inventions herein may be realized by reference to the remaining portions of the specification and the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a client screen view in a virtual world system according to the present invention.

FIG. 2 is a logical block diagram of the hardware elements of a virtual world system.

FIG. 3 is a block diagram of the elements of one embodiment of a virtual world system, showing two clients and one server.

FIG. 4 is a more detailed block diagram of a client system according to one embodiment of the present invention.

FIG. 5 is an illustration of an avatar.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Although the preferred embodiment of the present invention can be used in a variety of applications, as will be apparent after reading the below description, the preferred embodiment is described herein using the example of a client-server architecture for use in a virtual world "chat" system. In this chat system, a user at each client system interacts with one or more other users at other client systems by inputting messages and sounds and by performing actions, where these messages and actions are seen and acted upon by other clients. FIG. 1 is an example of what such a client might display.

Each user interacts with a client system and the client system is networked to a virtual world server. The client system are desktop computers, terminals, dedicated game controllers, workstations, or similar devices which have graphical displays and user input devices. The term "client" generally refers to a client machine, system and/or process, but is also used to refer to the client and the user controlling the client.

FIG. 1 is an illustration of a client screen display 10 seen by one user in the chat system. Screen display 10 is shown with several stationary objects (wall, floor, ceiling and clickable object 13) and two "avatars" 18. Each avatar 18 is a three dimensional figure chosen by a user to represent the user in the virtual world. Each avatar 18 optionally includes a label chosen by the user. In this example, two users are shown: "Paula" and "Ken", who have chosen the "robot" avatar and the penguin avatar, respectively. Each user interacts with a client machine (not shown) which produces a display similar to screen display 10, but from the

perspective of the avatar for that client/user. Screen display 10 is the view from the perspective of a third user, D, whose avatar is not shown since D's avatar is not within D's own view. Typically, a user cannot see his or her own avatar unless the chat system allows "out of body" viewing or the avatar's image is reflected in a mirrored object in the virtual world.

Each user is free to move his or her avatar around in the virtual world. In order that each user see the correct location of each of the other avatars, each client machine sends its current location, or changes in its current location, to the server and receives updated position information of the other clients.

While FIG. 1 shows two avatars (and implies a third), typically many more avatars will be present. A typical virtual world will also be more complex than a single room. The virtual world view shown in FIG. 1 is part of a virtual world of several rooms and connecting hallways as indicated in a world map panel 19, and may include hundreds or users and their avatars. So that the virtual world is scalable to a large number of clients, the virtual world server must be much more discriminating as to what data is provided to each clients. In the example of FIG. 1, although a status panel 17 indicates that six other avatars are present, many other avatars are in the room, but are filtered out for crowd control.

FIG. 2 is a simplified block diagram of the physical architecture of the virtual world chat system. Several clients 20 are shown which correspond with the users controlling avatars 18 shown in screen display 10. These clients 20 interact with the virtual world server 22 as well as the other clients 20 over a network 24 which, in the specific embodiment discussed here, is a TCP/IP network such as the Internet. Typically, the link from the client is narrowband, such as 14.4 kbps (kilobits/second).

Typically, but not always, each client 20 is implemented as a separate computer and one or more computer systems are used to implement virtual world server 22. As

used here, the computer system could be a desktop computer as are well known in the art, which use CPU's available from Intel Corporation, Motorola, SUN Microsystems, Inc., International Business Machines (IBM), or the like and are controlled by operation systems such as the Windows® program which runs under the MS-DOS operating system available from Microsoft Corporation, the Macintosh® O/S from Apple Computer, or the Unix® operating system available from a variety of vendors. Other suitable computer systems include notebook computers, palmtop computers, hand-held programmable computing devices, special purpose graphical game machines (e.g., those sold by Sony, SEGA, Nintendo, etc.), workstations, terminals, and the like.

The virtual world chat system is described below with reference to at least two hypothetical users, A and B. Generally, the actions of the system are described with reference to the perspective of user A. It is to be understood that, where appropriate, what is said about user A applies to user B, and vice versa, and that the description below also holds for a system with more than two users (by having multiple users A and/or B). Therefore, where an interaction between user A and user B is described, implied therein is that the interaction could take place just as well with users A and B having their roles reversed and could take place in the same manner between user A and user C, user D, etc. The architecture is described with reference to a system where each user is associated with their own client computer system separate from the network and servers, however a person of ordinary skill in the art of network configuration would understand, after reading this description, how to vary the architecture to fit other physical arrangements, such as multiple users per computer system or a system using more complex network routing structures than those shown here. A person of ordinary skill in the art of computer programming will also understand that where a process is described with reference to a client or server, that process could be a program executed by a CPU in that client or server system and the program could be stored in a permanent memory, such as a

hard drive or read-only memory (ROM), or in temporary memory, such as random access memory (RAM). A person of ordinary skill in the art of computer programming will also understand how to store, modify and access data structures which are shown to be accessible by a client or server.

Referring now to FIG. 3, a block diagram is shown of a world system 54 in which a user A, at a first client system 60 (client A), interacts with a user B at a second client system 60 (client B) via a server 61. Client system 60 includes several databases, some of which are fixed and some of which are modifiable. Client system 60 also includes storage for program routines. Mechanisms for storing, reading and modifying data on computers such as client system 60 are well known in the art, as are methods and means for executing programs and displaying graphical results thereof. One such program executed by client system 60 is a graphical rendering engine which generates the user's view of the virtual world.

Referring now to FIG. 4, a detailed block diagram of client 60 used by a user, A is shown. The other clients used by other users are similar to client 60.

The various components of client 60 are controlled by CPU 100. A network packet processor 102 sends and receives packets over network connection 80. Incoming packets are passed to a network message processor 104 which routes the message, as appropriate to, a chat processor 106, a custom avatar images database 108, a short object ID lookup table 110, or a remote avatar position table 112. Outgoing packets are passed to network packet processor 102 by network message processor in response to messages received from chat processor 106, short object ID lookup table 110 or a current avatar position register 114.

Chat processor 106 receives messages which contain conversation (text and/or audio) or other data received from other users and sends out conversation or other data directed to other users. The particular outgoing conversation is provided to chat processor 106 by input devices 116, which might include a keyboard, microphones, digital video cameras, and the like. The routing of the conversation message depends

on a selection by user A. User A can select to send a text message to everyone whose client is currently on line ("broadcast"), to only those users whose avatars are "in range" of A's avatar ("talk"), or to only a specific user ("whispering"). The conversation received by chat processor 106 is typically received with an indication of the distribution of the conversation. For example, a text message might have a "whisper" label prepended to it. If the received conversation is audio, chat processor 106 routes it to an audio output device 118. Audio output device 118 is a speaker coupled to a sound card, or the like, as is well known in the art of personal computer audio systems. If the received conversation is textual, it is routed to a rendering engine 120 where the text is integrated into a graphical display 122. Alternatively, the text might be displayed in a region of display 122 distinct from a graphically rendered region.

Current avatar position register 114 contains the current position and orientation of A's avatar in the virtual world. This position is communicated to other clients via network message processor 104. The position stored in register 114 is updated in response to input from input devices 116. For example, a mouse movement might be interpreted as a change in the current position of A's avatar. Register 114 also provides the current position to rendering engine 120, to inform rendering engine 120 of the correct view point for rendering.

Remote avatar position table 112 contains the current positions of the "in range" avatars near A's avatar. Whether another avatar is in range is determined a "crowd control" function, which is needed in some cases to ensure that neither client 60 nor user A get overwhelmed by the crowds of avatars likely to occur in a popular virtual world.

Server 61 maintains a variable, N, which sets the maximum number of other avatars A will see. Client 60 also maintains a variable, N', which might be less than N, which indicates the maximum number of avatars client 60 wants to see and/or hear. The value of N' can be sent by client 0 to server 61. One reason for setting N' less than N is where

client 60 is executed by a computer with less computing power than an average machine and tracking N avatars would make processing and rendering of the virtual world too slow. Once the number of avatars to be shown is determined, server 61
 5 determines which N avatars are closest to A's avatar, based on which room of the world A's avatar is in and the coordinates of the avatars. This process is explained in further detail below. If there are less than N avatars in a room which does not have open doors or transparent walls and client 60 has not
 10 limited the view to less than N avatars, A will see all the avatars in the room. Those avatars are thus "neighboring" which means that client 60 will display them.

Generally, the limit set by server 61 of N avatars and the limit set by client 60 of N' avatars control how many
 15 avatars A sees. If server 61 sets a very high value for N, then the limit set by client 60 is the only controlling factor. In some cases, the definition of "neighboring" might be controlled by other factors besides proximity. For example, the virtual world might have a video telephone object
 20 where A can speak with and see a remote avatar. Also, where N or more unfriendly avatars are in close proximity to A's avatar and they persist in following A's avatar, A will not be able to see or communicate with other, friendly avatars. To prevent this problem, user A might have a way to filter out
 25 avatars on other variables in addition to proximity, such as user ID.

In any case, remote avatar position table 112 contains an entry for each neighboring avatar. That entry indicates where the remote avatar is (its position), its
 30 orientation, a pointer to an avatar image, and possible other data about the avatar such as its user's ID and name. The position of the avatar is needed for rendering the avatar in the correct place. Where N' is less than N, the client also uses position data to select N' avatars from the N avatars
 35 provided by the server. The orientation is needed for rendering because the avatar images are three-dimensional and look different (in most cases) from different angles. The pointer to an avatar image is an index into a table of

preselected avatar images, fixed avatar image database 71, or custom avatar images database 108. In a simple embodiment, each avatar image comprises M panels (where M is greater than two with eight being a suitable number) and the i-th panel is the view of the avatar at an angle of $360 \cdot i / M$ degrees. Custom avatar images are created by individual users and sent out over network connection 80 to other clients 60 which are neighbors of the custom avatar user.

Short object ID lookup table 110 is used to make communications over network connection 80 more efficient. Instead of fully specifying an object, such as a particular panel in a particular room of a world avatar, a message is sent from server 61 associating an object's full identification with a short code. These associations are stored in short object ID lookup table 110. In addition to specifying avatars, the short object ID's can be used to identify other objects, such as a panel in a particular room.

Short object ID lookup table 110 might also store purely local associations. Although not shown in FIG. 4, it is to be understood that connections are present between elements shown and CPU 100 as needed to perform the operations described herein. For example, an unshown connection would exist between CPU 100 and short object ID lookup table 110 to add, modify and delete local short object ID associations. Similarly, CPU 100 has unshown connections to rendering engine 120, current avatar position register 114 and the like.

Client 60 includes a rooms database 70, which describes the rooms in the virtual world and the interconnecting passageways. A room need not be an actual room with four walls, a floor and a ceiling, but might be simply a logical open space with constraints on where a user can move his or her avatar. CPU 100, or a specific motion control process, limits the motion of an avatar, notwithstanding commands from input devices 116 to do so, to obey the constraints indicated in rooms database 70. A user may direct his or her avatar through a doorway between two rooms, and if provided in the virtual world, may teleport from one room to another.

Client 60 also includes an audio compressor/decompressor 124 and a graphics compressor/decompressor 126. These allow for efficient transport of audio and graphics data over network connection 80.

In operation, client 60 starts a virtual world session with user A selecting an avatar from fixed avatar image database 71 or generating a custom avatar image. In practice, custom avatar image database 108 might be combined with fixed avatar image database 71 into a modifiable avatar image database. In either case, user A selects an avatar image and a pointer to the selected image is stored in current avatar position register 114. The pointer is also communicated to server 61 via network connection 80. Client 60 also sends server 61 the current position and orientation of A's avatar, which is typically fixed during the initialization of register 114 to be the same position and orientation each time.

Rooms database 70 in a fixed virtual world is provided to the user with the software required to instantiate the client. Rooms database 70 specifies a list of rooms, including walls, doors and other connecting passageways. Client 60 uses the locations of walls and other objects to determine how A's avatar's position is constrained. Rooms database 70 also contains the texture maps used to texture the walls and other objects. Avatar database 71 specifies the bitmaps used to render various predefined avatars provided with the client system. Using rooms database 70 and the locations, tags and images of all the neighboring avatars, then a view of objects and other avatars in the virtual world can be rendered using the room primitives database and the avatar primitives database.

Instead of storing all the information needed for rendering each room separately, a primitives database can be incorporated as part of rooms database 70. The entries in this primitives database describe how to render an object (e.g., wall, hill, tree, light, door, window, mirror, sign, floor, road). With the mirrored primitive, the world is not

actually mirrored, just the avatar is. This is done by mapping the avatar to another location on the other side of the mirrored surface and making the mirror transparent. This will be particularly useful where custom avatars are created, or where interaction with the environment changes the look of the avatar (shark bites off arm, etc.).

The typical object is inactive, in that its only effect is being viewed. Some objects cause an action to occur when the user clicks on the object, while some objects just take an action when their activating condition occurs. An example of the former is the clickable objects 13 shown in FIG. 1 which brings up a help screen. An example of the latter is the escalator object. When a user's avatar enters the escalator's zone of control, the avatar's location is changed by the escalator object automatically (like a real escalator).

The avatars in fixed avatar image database 71 or custom avatar images database 108 contain entries which are used to render the avatars. A typical entry in the database comprises N two-dimensional panels, where the i-th panel is the view of the avatar from an angle of $360 * i/N$ degrees. Each entry includes a tag used to specify the avatar.

In rendering a view, client 60 requests the locations, orientations and avatar image pointers of neighboring remote avatars from server 61 and the server's responses are stored in remote avatar position table 112. Server 61 might also respond with entries for short object ID lookup table 110. Alternatively, the updates can be done asynchronously, with server 61 sending periodic updates in response to a client request or automatically without request.

Rendering engine 120 then reads register 114, remote avatar position table 112, rooms database 70 and avatar image databases as required, and rendering engine 120 renders a view of the virtual world from the view point (position and orientation) of A's avatar. As input devices 116 indicate motion, the contents of register 114 are updated and rendering engine 120 re-renders the view. Rendering engine 120 might

periodically update the view, or it may only update the view upon movement of either A's avatar or remote avatars.

Chat processor 106 accepts chat instructions from user A via input devices 116 and sends conversation messages to server 61 for distribution to the appropriate remote clients. If chat processor 106 receives chat messages, it either routes them to audio output device 118 or to rendering engine 120 for display.

Input devices 116 supply various inputs from the user to signal motion. To make movement easier and more natural, client 60 performs several unique operations. One such operation is "squared forward movement" which makes it easier for the user to move straight. Unlike ordinary mouse movements, where one mouse tick forward results in an avatar movement forward one unit and one mouse tick to the left or right results in side movement of one unit, squared forward movement squares the forward/backward ticks or takes the square root of the sideways ticks or divides by the number of forward/backward ticks. For example, if the user moves the mouse F mouse ticks forward, the avatar moves F screen units forward, whereas if the user moves the mouse F mouse units forward and L mouse units to the left, the avatar moves F units forward and L/F screen units to the left. For covering non-linear distances, (F,L) mouse units (i.e., F forward, L to the side) might translate to (F^2, L) screen units.

As mentioned above, user input could also be used to signal a desire for interaction with the environment (e.g. clicking on a clickable object). User input could also be used to signal for a viewpoint change (e.g. head rotation without the avatar moving, chat inputs and login/logout inputs.

In summary, client 60 provides an efficient way to display a virtual, graphical, three-dimensional world in which a user interacts with other users by manipulating the positions of his or her avatar and sends chat messages to other users.

Network connection 80 will now be further described. Commonly, network connection 80 is a TCP/IP network connection

between client 60 and server 61. This connection stays open as long as client 60 is logged in. This connection might be over a dedicated line from client 60, or might be a SLIP/PPP connection as is well known in the art of network connection.

5 The network messages which pass over network connection 80 between client 60 and server 61 are described immediately below briefly, with a more detailed description in Appendix A. Three main protocols exist for messaging between client 60 and server 61: 1) A control protocol, 2) a document
10 protocol, and 3) a stream protocol. The control protocol is used to pass position updates and state changes back and forth between client 60 and server 61. The control protocol works with a very low bandwidth connection.

15 The document protocol is used between client 60 and server 61 to download documents (text, graphics, sound, etc.) based on Uniform Resource Locators (URLs). This protocol is a subset of the well-known HTTP (Hyper-Text Transport Protocol). This protocol is used relatively sparingly, and thus bandwidth is not as much of a concern as it is with the control
20 protocol. In the document protocol, client 60 sends a document request specifying the document's URL and server 61 returns a copy of the specified document or returns an error (the URL was malformed, the requested URL was not found, etc.).

25 The stream protocol is used to transfer real-time video and audio data between client 60 and server 61. Bandwidth is not as much a concern here as it is with the control protocol.

30 Each room, object, and user in a virtual world is uniquely identified by a string name and/or numerical identifier. For efficient communications, string names are not passed with each message between client 60 and server 61, but are sent once, if needed, and stored in short object ID lookup table 110. Thereafter, each message referring to an
35 object or a user need only refer to the short object ID which, for 256 or less objects, is only an 8-bit value. Rooms are identified by a unique numerical value contained in two bytes (16 bits).

The control protocol is used by client 60 to report the location and state information, such a "on" and "off" states for a light object or other properties, for user A to server 61 and is used by server 61 to send updates to client 60 for remote avatar position table 112 and updates of characteristics of other objects in the virtual world environment. Server 61 also uses the control protocol to update client 61 on which avatars are in range of A's avatar. To allow for piecemeal upgrading of a virtual world system, client 60 will not err upon receipt of a message it does not understand, but will ignore such as message, as it is likely to be a message for a later version of client 60.

Each message is formed into a control packet and control packets assume a very brief form so that many packets can be communicated quickly over a narrowband channel. These control packets are not to be confused with TCP/IP or UDP packets, although a control packet might be communicated in one or more TCP/IP or UDP packets or more than one control packet might be communicated in one TCP/IP packet.. The format of a control packet is shown in Table 1.

TABLE 1.

| <u>FIELD</u> | <u>SIZE</u> | <u>DESCRIPTION</u> |
|--------------|---|--|
| PktSize | UInt8 | Number of bytes in the control packet (including Pktsize byte) |
| ObjID | UInt8 (ShortObjID) 0string (LongObjID) | Identifies the object to which the command is directed |
| Command | UInt8 + arguments | Describes what to do with the object |

"UInt8" is an 8-bit unsigned integer. "0string" is a byte containing zero (indicating that a long object identifier is to follow) followed by a string (which is defined to be a byte containing the size of the string followed by the characters

of the string). Each control packet contains one command or one set of combined commands. The ObjID field is one of two formats: either a ShortObjID (0 to 255) or a LongObjID (a string). The ObjID field determines which object in the client's world will handle the command. Several ShortObjID values are preassigned as shown in Table 2.

TABLE 2.

| <u>ShortObjID</u> | <u>Object</u> |
|-------------------|--|
| 0 | A short ObjID of 0 indicates that a Long ObjID follows |
| 1 | The Client's Avatar |
| 254 | CO - Combine Object |
| 255 | PO - Protocol Object |

The other ShortObjID values are assigned by server 61 to represent objects in the virtual world. These assignments are communicated to client 60 in a control packet as explained below. The assignments are stored by client 60 in short object ID lookup table 110. The ShortObjID references are shorthand for an object which can also be referenced by a LongObjID.

When commands are directed at the CO object (ShortObjID=254), those commands are interpreted as a set of more than one command. When commands are directed at the PO object, the command applies to the communications process itself. For example, the REGOBJIDCMD command, which registers an association between a ShortObjID and a LongObjID, is directed at the PO object. Upon receipt of this command, client 60 registers the association in the short object ID lookup table.

A command takes the form of a command type, which is a number between 0 and 255, followed by a string of arguments as needed by the particular command.

The CO object is the recipient of sets of commands. One use of a set of commands is to update the positions of several avatars without requiring a separate control packet for each avatar, thus further saving network bandwidth. The form of the command is exemplified by the following command to

5 move objects 2 and 4 (objects 2 and 4 are remote avatars):

S>C CO SHORTLOCCMD [2 -10 -20 -90] [4 0 0 90]

10 In the above control packet, "S>C" indicates the direction of the packet (from server to client), CO is the object, SHORTLOCCMD is the command type, and the command type is followed by three abbreviated commands. The above control packet requires only fifteen bytes: one for packet size (not

15 shown), one for the CO object ID, one for the command type and twelve for the three abbreviated commands. Note that the "S>C" indicator is not part of the control packet. The position of the boundaries between commands (indicated above with brackets, which are not actually communicated) is

20 inferred from the fact that the SHORTLOCCMD command type requires four byte-wide arguments. Each abbreviated command in a command set is the same size, for easy parsing of the commands by the CO. Examples of abbreviated commands for which a CO command is useful are the Teleport, Appear,

25 Disappear, and ShortLocation commands. These commands, and other commands, are described in more detail in Appendix A. Appendix A also shows the one byte representation of SHORTLOCCMD as well as the one byte representations of other command types. The contents of control packets described

30 herein are shown in a readable form, however when transmitted over network connection 80, the control packets are compacted using the values shown in Appendix A.

35 The following examples show various uses of control packets. In the following sequences, a line beginning with "S>C" denotes a control packet sent from server 61 to client 60, which operates user A's avatar and interacts with user A. Similarly, a line beginning with "C>S" denotes a control

packet sent from client 60 to server 61. Note that all of the lines shown below omit the packet size, which is assumed to be present at the start of the control packet, and that all of the lines are shown in readable format, not the compact, efficient format discussed above and shown in Appendix A.

The following is a control packet for associating ShortObjIDs with Long Object names:

10 S>C PO REGOBJIDCMD "Maclen" 5

Server 61 determines what short object ID (ShortObjID) to use for a given object. With four pre-allocated Short ObjID values, server 61 can set up 252 other ID values. In the above command, the object whose long name is "Maclen" is assigned the ShortObjID of 5. This association is stored by client 60 in short object ID lookup table 110. The first two fields of the above command line, "PO" and "REGOBJIDCMD" indicate that the protocol object (PO) is to handle the command and indicate the command type (REGOBJIDCMD). The actual binary for the command is, in hexadecimal (except for the string):

25 S>C FF 0D 06 Maclen 05

The following is a control packet containing a chat message:

30 C>S CLIENT TEXTCMD "" "Kyle, How is the weather?"

The ObjID field is set to CLIENT. The field following the command type (TEXCMD) is unused in a text command from client to server. Server 61 will indicate the proper ObjID of user A's avatar when sending this message back out to the remote clients who will receive this chat message. Thus, server 61 might respond to the above command by sending out the following control packet to the remote clients (assuming user A is named "Judy"):

S>C CLIENT TEXTCMD "Judy" "Kyle, How is the weather?"

Of course, the text "Judy" need not be sent. If a short object identifier has been registered with the client for Judy's avatar, only the ShortObjID for "Judy" need be sent. User A may also whisper a command to a single user who may or may not be in the same room, or even in the same virtual world. For example:

10 C>S CLIENT WHISPERCMD "Kyle" "Kyle, How are you?"

Server 61 will route this message directly to the recipient user. On the recipient client, the control packet for the message will arrive with the ObjID of the sender (just like a TEXTCMD), however, that client will know that it is a private message because of the command type. The remote client receives the following control packet from server 61:

S>C CLIENT WHISPERCMD "Judy" "Kyle, How are you?"

Other examples of control packets, such as those for entering and exiting sessions and applications, are shown in Appendix B. For state and property changes, objects have two kinds of attribute variables. The first kind of attribute values are "states" which represent boolean values. The second kind of attribute values are called "properties" and may contain any kind of information. Client 60 reports local attribute changes to server 61 as needed and server 61 reports to client 60 the attribute changes which might affect client 60. A different command is used for each kind of attribute, as shown in Appendix B.

From user A's point of view, avatars will appear and disappear from A's view in a number of circumstances. For example, avatars enter and leave rooms and move in and out of visual range (as handled by crowd control rules described below). Avatars also teleport from room to room, which is different than moving in and out of rooms. Client 60 will

send server 61 the following location and/or room change commands under the circumstances indicated:

- LOCATIONCMD: normal movement of A's avatar
- 5 - ROOMCHGCMD: changing rooms by walking
- TELEPORTCMD: changing rooms and/or location by teleporting
- TELEPORTCMD, ExitType=0: entering the application
- TELEPORTCMD, EntryType=0: exiting the application.

10

When other, remote clients take such actions, server 61 sends control packets to client 60, such as:

- 15 - TELEPORTCMD: remote avatar teleported (EntryType or ExitType may be 0 if the exit or entry was not visible to user A)
- DISAPPEARACTORCMD: remote avatar was previously visible (in range), but is now invisible (out of range) due to normal (non-teleport) movement including having walked out of the
- 20 room
- APPEARACTORCMD: remote avatar was not visible, and is now visible (command includes the remote avatar's Location and Room)
- SHORTLOCCMD or LONGLOCCMD: remote avatar was visible
- 25 before, and is still now, but has moved.

Two methods exist for updating the position of an actor (avatar). The LONGLOCCMD method uses full absolute position (X, Y, and Z) and orientation. The SHORTLOCCMD only

30 updates the X and Y coordinates and the orientation. In addition, the short method limits the change in position to plus or minus 127 in the X and/or Y coordinates and/or +/- 127 in the orientation. Client 60 sends a LONGLOCCMD to server 61

35 to update the client's position. Whenever possible, server 61 uses the combined SHORTLOCCMD to update all of the visible avatars at once. If an avatar has moved too great a distance,

or has moved in the Z direction, server 61 then uses a LONGLOCCMD for that avatar.

The following is an example of a control packet sent from client 60 to server 61 to update user A's location:

5

```
C>S CLIENT LONGLOCCMD 2134 287 7199 14003
```

In the binary (given in hex), this is:

10

```
C>S 01 01 0856 011F 1C1F 36B3
```

Note that bytes are two digits and shorts (16 bits) are four digits. They are separated by spaces here for clarity. The actual packet would contain no spaces.

15

The Server often uses the combined short location update command. This command concatenates several ShortLocationCommands. Rather than sending a command to each of the objects in question, a single combined command is sent to the combine object (CO). This object takes the command and applies it to a list of truncated commands. The truncated commands contain a ShortObjID reference to the object to be moved and a change in the X and Y positions and orientation. If server 61 wants to update the positions of objects 56, 42 and 193, it would send the following:

20

25

```
S>C CO SHORTLOCCMD 56 -4 6 -10 42 21 3 -50 193 -3 -21 10
```

This command can contain a variable number of subcommands. Each subcommand is of fixed length so that the CO can find the length of it from a table check or other quick lookup method. The binary form of this command is:

30

```
S>C FE 04 38 FC 06 F6 2A 15 03 CD C1 FD EB 10
```

35

When user A changes rooms by walking through a door, a RoomChangeCommand control packet is sent by client 60 to server 61 to inform server 61 that the room change occurred.

The command specifies the new room and location for user A's avatar as follows:

C>S CLIENT ROOMCHNGCMD 01 25 1200 150 180

5

The first argument is the ObjID of the avatar that is leaving the room, the second argument is the command type (room change), and the third argument is the room that the avatar is entering. The next three arguments are the X, Y and Z positions at which to place the avatar in the room. The last argument is the direction the actor is facing (orientation). Note that the first argument is always the ObjID for the local avatar, CLIENT = 1.

10

15

When user A teleports from one room to another, the TeleportCommand is sent by client 60 to server 61 to inform server 61 that the teleport occurred. The method of leaving the room and entering the new one is sent to server 61. This allows server 61 to inform other clients to display explosions or clouds, smoke or other indications of the teleportation appearance/disappearance of the avatar. The teleport command is as follows:

20

C>S CLIENT TELEPORTCMD 01 02 02 25 1200 150 180

25

The first argument is the ObjID of the avatar that is teleporting, the second argument is the command type (teleport), and the third argument is the room that the avatar is entering. The next two arguments are the leaving method and the entering method respectively. The next three arguments are the X, Y and Z positions at which to place the actor in the room. The last argument is the direction the actor is facing (orientation). Note that the first argument is always the ObjID for the local avatar, CLIENT = 1.

30

35

Client 60 is responsible for implementing some sort of caching mechanism for actors. When client 60 receives a TeleportCommand or AppearCommand for an avatar that is appearing, it must first determine if it currently has information for the specified object cached. If not, client

60 can issue a request for any needed information pertaining to the object. Suppose client 60 receives the following command specifying that "Mitra" has arrived at room 15:

5 S>C "Mitra" TELEPORTCMD 15 3 3 0 0 0 0

If client 60 does not have an entry cached for this object ("Mitra"), or if the entry is dated, a request may be made for pertinent information (here, the long object ID is used since
10 client 60 does not have the short object Id association for this object):

C>S "Mitra" PROPREQCMD VAR_BITMAP

15 Server 61 will respond with a PropertyCommand as necessary to communicate the required information. An example of pertinent information above is a request for the avatar bitmap to use to represent mitra.

20 Crowd control is one of the tougher problems solved by the present system. Crowd control is handled using a number of commands. In a typical situation, the number of avatars in a room is too large to be handled by client 60 and displayed on display 122. The maximum number of avatars, N,
25 is determined by server 61, but might also be determined for each client.

Server 61 addresses this problem by maintaining, for each user, a list of the N avatars nearest to the location of that user's avatar. This list may be managed by the server in
30 any of a number of ways. When an avatar (B, for example) is removed from another user's (C, for example) list because avatar B can no longer be seen by C (i.e., B is no longer one of the N nearest avatars), Server 61 sends a DISAPPEARACTORCMD to the object for avatar B on client C. This occurs as a
35 consequence of client B changing rooms with a ROOMCHANGECMD or TELEPORTCMD, or due to crowd control.

Client 60 does not necessarily delete an entry from remote avatar lookup table 112 or short object ID lookup table

110 if a remote avatar disappears, but just marks it as being non-visible. In some cases, a user can see another user's avatar, but that other user cannot see the first user's avatar. In other words, visibility is not symmetric.

5 However, chat exchange is symmetric, i.e., a user can only talk to those who can talk to the user.

When A's avatar is to be added to user B's lists when A becomes visible to B by reason of movement, room change, crowd control, or the like, server 61 (more precisely
10 the protocol object PO on server 61) sends a REGOBJIDCMD control packet to the PO of B's client 60 and B's client 60 will add the association of A's avatar with a short object ID to short object ID lookup table 110. Server 61 also sends an
15 APPEARACTORCMD control packet to A's client giving the room and location of B. If A's client 60 does not have the appropriate information cached for B, A's client 60 sends a PropertyRequestCommand control packet to server 61 asking for the properties of B, such as the bitmap to use to display B's
20 avatar. Server 61 will return the requested information, which it might need to obtain from B's client 60. For example, the control packet:

PROPREQCMD VAR_BITMAP

25 might be used. Whenever possible, location updates from server 61 will be sent as SHORTLOCCMD control packets addressed to the remote avatar using its ShortObjId and the DisappearActorCommands, AppearActorCommands, and
30 TeleportCommands used to update client 60 on the status of visible remote avatars will be combined as described for the ShortLocationCommands.

The server 61 shown in FIG. 3 will now be described. Server 61 comprises generally a network layer 62, protocol
35 objects 63, user objects 64, room objects 65. In an object oriented software embodiment of the invention, each of these objects and layers are implemented as objects with their specific methods, data structures and interfaces. Where server 61 is implemented on a hardware running the Unix

operating system, these objects might be objects in a single process or multiple processes. Where server 61 is implemented on hardware running the Windows(tm) operating system alone or in combination with the MS-DOS operating system or the like, the layers and objects might be implemented as OLE (Object Linking and Embedding) objects.

One protocol object 63 and one user object 64 are instantiated for each user who logs into server 61. Network layers 62 accepts TCP/IP connections from clients 60. A socket is opened and command buffers are allocated for each client 60. Network layer 62 is responsible for instantiating a protocol object 63 for each TCP/IP socket established. This layer handles the sending and receiving of packets, such as control packets, document packets and stream packets, over the network. All sockets are examined by server 61 on a periodic basis; completed control packets received from a client 60 are processed by server 61, and outgoing control packets to a client 60 which are pending are sent.

Protocol object 63 handles translation of internal messages to and from the cryptic and compressed form of the control packets which are sent over network connection 80, as explained in Appendices A and B. Protocol object 63 handles all session initialization and authentication for its client 60, and is responsible for instantiating a user object 64 for authenticated users.

User object 64 tracks the location of its user's avatar, which includes at least the room in which the user is located, the user's coordinates in the room and the user's orientation in that room. User object 64 also maintains a list of the N nearest neighboring remote avatars (i.e., avatars other than the avatar for the user object's client/user) in the room. This list is used to notify the user object's client 60 regarding changes in the N closest remote avatars and their locations in the room. The list is also used in disseminating text typed by the user to only those users nearest him or her in the room. This process of notifying client 60 of only the N nearest neighbors is handled as part of crowd control.

One room object 65 is instantiated for each room in rooms database 70 and the instantiation is done when server 61 is initialized. Alternatively, room objects can be instantiated as they are needed. As explained above, the term "room" is not limited to a visualization of a typical room, but covers any region of the virtual world which could be grouped together, such as the underwater portion of a lake, a valley, or a collection of streets. The room object for a specific room maintains a list of the users currently located in that room. Room object 65 periodically analyzes the positions of all users in the room using a cell-based algorithm, and sends a message to each user object 64 corresponding to those users in the room, where the message notifies the user object of its user's N nearest neighbors.

Periodically, the locations of the users in each room are examined and a square two-dimensional bounding box is placed around the users' current locations in the room. This square bounding box is then subdivided into a set of square cells. Each user is placed in exactly one square. Then, for each user, the cells are scanned in an outwardly expanding wave beginning with the cell containing the current user of interest, until at least N neighbors of that user are found. If more than N are found, the list of neighbors is sorted, and the closest N are taken.

One or more world object 66 may be instantiated at the time server 61 is started. The world object maintains a list of all the users currently in the world and communicates with their user objects 64. The world object also maintains a list of all the rooms in the world and communicates with the room objects 65 for those rooms. The world object periodically initiates the analysis of user positions in each room and subsequent updating of avatar information to clients (60). In addition, the world object periodically initiates the collection of statistics on usage (for billing, study of which rooms are most popular, security logs, etc.) which are logged to a file.

Server 61 also has a rooms/world database 92 which is similar to the rooms/world database 70 in client 60.

Server 61 does not need the primitives databases because there is no display needed at the server. Server 61 does, however, include a user state database 90, which maintains state information on each user, such as address, log-in time, accounting information, etc.

Several interconnections are shown in FIG. 3. Path 81 between a protocol object 63 and a user object 64 carries messages between a client 60 and the user object 64 representing that client (before or after having been translated by a protocol object 63). Typical messages from the client to the user object include:

- Move my avatar to (x, y, z, orientation)
- Send a text message to all neighboring remote avatars

Typical messages from the user object to the client are:

- User X teleported into your view at (x, y, z, orient.)
- User Z has just left your view
- User W has moved to (x, y, z, orientation)
- Here is text from user Y
- Here is private text (whispered) from user A

The path 82 between a client 60 and a user object 64 other than its own user object 64 is used to send whispers from user to user. Path 83 is used for internal messages sent directly between user objects 64. Messages taking this path typically go from a given user to those users who are among its N nearest neighbors. Typical messages include:

- Here is text I have typed
- I have just teleported to a given room and location
- I have changed my state (logged in, logged out, etc.)
- I have changed one or more of my properties

Path 84 is used for messages between a user object 64 and a room object 65. User objects 64 communicate their

location to the room 65 they are currently in. Periodically, the room object will notify the user object of the identities and locations of the users' N nearest neighbors. Messages from the user object to the room include:

- I have just teleported either into or out of this room
- I have just entered this room
- I have just left this room
- My new location in this room is (x, y, z, orientation)

The only message that passes from the room object to a user object is the one that notifies the user of its N nearest neighbors. Path 85 is used for communications between protocol objects and world object 66. Protocol object 63 can query world object 66 regarding the memory address (or functional call handle) of the user object 64 representing a given user in the system. This is the method that is used to send a whisper message directly from the protocol object to the recipient user object. Path 86 is used for communications between user object 64 and world object 66 to query the world object regarding the memory address or function call handle of the room object 65 representing a given room in the world. This is required when a user is changing rooms. FIG. 5 is an illustration of the penguin avatar rotated to various angles.

The above description is illustrative and not restrictive. Many variations of the invention will become apparent to those of skill in the art upon review of this disclosure. The scope of the invention should, therefore, be determined not with reference to the above description, but instead should be determined with reference to the appended claims along with their full scope of equivalents.

Appendix A - Client/Server Control Protocol Commands (in BNF)

Valid CommandTypes are integers between 0 and 255. Several of these are shown below as part of the BNF (Backus-Nauer Format) description of the command structures. Per convention, words starting with uppercase characters are non-terminals while those in quotes or in lowercase are terminal literals.

Basics

$a \mid b$ = Either a or b.

"abc" = The exact string of characters a, b and c in the order shown.

a^+ = One or more occurrences of a.

a^* = Zero or more occurrences of a.

10 = A number 10. In the ASCII protocol, this is the ASCII string "10", in the binary form, it is a byte with a value of 10.

$N..M$ = A numerical range from N to M.
Equivalent to: $N \mid N+1 \mid N+2 \mid \dots \mid M-1 \mid M$

Command Structures

Packet = PktSize Message

PktSize = UInt8 (size includes PktSize field)

Message = ObjID Command

ObjID = LongObjID \mid ShortObjID

LongObjID = 0String

ShortObjID = UInt8

Command = CommandType CommandData

CommandType = UInt8

[Other commands might be added to these:]

Command = LongLocationCommand
ShortLocationCommand
StateCommand
PropertyCommand
PropertyRequestCommand
CombinedCommand
RoomChangeCommand
SessionInitCommand
SessionExitCommand
ApplicationInitCommand
ApplicationExitCommand
DisappearActorCommand
AppearActorCommand
RegisterObjIdCommand
TeleportCommand
TextCommand
ObjectInfoCommand
LaunchAppCommand
UnknownCommand

| WhisperCommand
| StateRequestCommand

| | | |
|----|--------------------------------------|---|
| 5 | TeleportCommand Location | = TELEPORTCMD NewRoom ExitType EntryType |
| | RoomChangeCommand | = ROOMCHNGCMD NewRoom Location |
| 10 | LongLocationCommand | = LONGLOCCMD Location |
| | DisappearActorCommand | = DISAPPEARACTORCMD |
| | AppearActorCommand | = APPEARACTORCMD NewRoom Location |
| 15 | Location | = X Y Z Direction |
| | X, Y, Z, Direction | = SInt16 |
| 20 | StateCommand | = STATECMD SetFlags ClearFlags |
| | SetFlags, ClearFlags | = UInt32 |
| | PropertyCommand | = PROPCMD Property+ |
| 25 | PropertyRequestCommand | = PROPREQCMD VariableID* |
| | StateRequestCommand | = STATEREQCMD |
| 30 | Property | = VariableID VariableValue |
| | VariableID | = ShortVariableId LongVariableId |
| | ShortVariableId | = UInt8 |
| 35 | LongVariableId | = 0String |
| | VariableValue | = String |
| 40 | ShortLocationCommand | = SHORTLOCCMD DeltaX DeltaY DeltaO |
| | DeltaX, DeltaY | = SByte |
| | DeltaO | = SByte (plus 128 to -128 degrees) |
| 45 | CombinedCommand | = CombinedLocationCommand CombinedAppearCommand CombinedTeleportCommand CombinedDisappearCommand UnknownCombinedCommand |
| 50 | CombinedLocationCommand | = SHORTLOCCMD AbbrevLocCommand+ |
| | AbbrevLocCommand | = ShortObjID DeltaX DeltaY DeltaO |
| 55 | CombinedAppearCommand | = APPEARACTORCMD AbbrevAppearCommand+ |
| | AbbrevAppearCommand | = ShortObjID NewRoom Location |
| 60 | CombinedDisappearCommand | = DISAPPEARACTORCMD AbbrevDisappearCommand+ |
| | AbbrevDisappearCommand | = ShortObjID |
| | CombinedTeleportCommand | = TELEPORTCMD AbbrevTeleportCommand+ |
| 65 | AbbrevTeleportCommand | = ShortObjID NewRoom ExitType EntryType Location |
| | [for now:] UnknownCombinedCommand | = 0..3, 5..10, 13..17, 19..255 |

| | | |
|----|------------------------|--|
| | NewRoom | = UInt16 |
| | ExitType, EntryType | = UInt8 |
| 5 | SessionInitCommand | = SESSIONINITCMD Property+ |
| | SessionExitCommand | = SESSIONEXITCMD Property+ |
| 10 | ApplicationInitCommand | = APPINITCMD Property+ |
| | ApplicationExitCommand | = APPEXITCMD Property+ |
| | RegisterObjIdCommand | = REGOBJIDCMD String ShortObjID |
| 15 | TextCommand | = TEXTCMD ObjID String |
| | WhisperCommand | = WHISPERCMD ObjID String |
| 20 | LaunchAppCommand | = LAUNCHAPPCMD String |
| | [for now:] | |
| | UnknownCommand | = 0, 15, 20..255 |
| 25 | String | = StringSize Char* |
| | StringSize field) | = UInt8 (size of string EXCLUDING StringSize |
| 30 | Char | = C datatype char |
| | UInt32 | = 0..4294967299 (32-bit unsigned) |
| 35 | SInt32 | = -2147483650..2147483649 (32-bit signed value) |
| | UInt16 | = 0..65535 (16-bit unsigned value) |
| 40 | SInt16 | = -32768..32767 (16-bit signed value) |
| | UInt8 | = 0..255 (8-bit unsigned value) |
| 45 | SByte | = -128..127 (8-bit signed value) |
| | LONGLOCCMD | = 1 |
| | STATECMD | = 2 |
| | PROPCMD | = 3 |
| | SHORTLOCCMD | = 4 |
| 50 | ROOMCHNGCMD | = 5 |
| | SESSIONINITCMD | = 6 |
| | SESSIONEXITCMD | = 7 |
| | APPINITCMD | = 8 |
| | APPEXITCMD | = 9 |
| 55 | PROPREQCMD | = 10 |
| | DISAPPEARACTORCMD | = 11 |
| | APPEARACTORCMD | = 12 |
| | REGOBJIDCMD | = 13 |
| | TEXTCMD | = 14 |
| 60 | LAUNCHAPPCMD | = 16 |
| | WHISPERCMD | = 17 |
| | TELEPORTCMD | = 18 |
| | STATEREQCMD | = 19 |
| 65 | CLIENT | = 1 |
| | CO | = 254 |
| | PO | = 255 |

Appendix B - Additional Control packet Examples**B.1. State and Property Changes**

State changes change a string of boolean values. Either the Client or the Server can send these. Each object can have up to 32 different state values. These are represented as bits in a bit string. If the Client wants to set bit 3 of the state variable of an object, 137, it sends the following:

```
C>S 137 STATECMD 4 0
```

In binary (given as hexadecimal) this is:

```
C>S 89 02 00000004 00000000
```

Properties take more possible values than states. Similar to state variables, properties are referenced in order. Variables may be represented as a predefined ID (counting from 1) or by an arbitrary string.

Assuming that the Client has changed its local copy of a variable (with the tag 6) in object 23. It would send a command to the Server as follows:

```
C>S 23 PROPCMD 6 "a new value"
```

The variable ID is a predefined shorthand name for a variable name. These names are predefined and hardcoded into the Client. They generally can't be changed without changing the Client executable. An old Client that sees a variable ID it does not know must ignore the command.

Some variables will always be defined, "bitmap" for example. These are defined in a fixed manner at the Client level. The Client will simply send these variable IDs to the Server which will transparently pass them on to other Clients.

The currently defined variable IDs are:

```
VAR_APPNAME = 1 // Name of Application to run
VAR_USERNAME = 2 // User's id.
VAR_PROTOCOL = 3 // Version of protocol used by client (int)
VAR_ERROR = 4 // Used in error returns to give error type
VAR_BITMAP = 5 // Filename of Bitmap
VAR_PASSWORD = 6 // User's password
VAR_ACTORS = 7 // Suggested # of actors to show client (N)
VAR_UPDATETIME = 8 // Suggested update interval (* 1/10 sec.)
VAR_CLIENT = 9 // Version of the client software (int)
```

The client can request the values for one or more properties with the PROPREQCMD:

```
C>S "Fred" PROPREQCMD VAR_BITMAP
S>C "Fred" PROPCMD VAR_BITMAP "skull.bmp"
```

A PROPREQCMD with no parameters will result in a PROPCMD being returned containing all the properties of the object the request was sent to.

If a PROPREQCMD is made with a request for a property that doesn't exist, an empty PROPCMD will be returned.

A STATEREQCMD requests the Server to respond with the current state.

B.2. Beginning and Exiting Sessions

To begin a session, the Client requests a connection from the Server. After the connection has been established, the Client sends a SessionInitCommand.

The SessionInitCommand should contain the User's textual name (preferably, this textual name is unique across all applications) and the version of the protocol to be used. For example, the User named "Bo" has established a connection and would now like to initiate a session.

```
C>S CLIENT SESSIONINITCMD VAR_USERNAME "Bo" VAR_PROTOCOL "11"
```

Currently defined variables for the SessionInitCmd are:

```
VAR_USERNAME      The account name of the user
VAR_PASSWORD      User password (preferably a plain text string)
VAR_PROTOCOL      The protocol version (int)
VAR_CLIENT        Version of the client software being used (int)
```

Note that the protocol defines the value as a string, but the (int) comment is a constraint on the values that may be in the string.

The Server will send an ack/nak indicating the success of the request. An ack will take the form:

```
S>C CLIENT SESSIONINITCMD VAR_ERROR 0
```

A nak will take the form:

```
S>C CLIENT SESSIONINITCMD VAR_ERROR 1
```

where the value of VAR_ERROR indicates the nature of the problem.

Currently defined naks include:

| | | |
|--------------------|----|---|
| * ACK | 0 | It's OK |
| * NAK_BAD_USER | 1 | User name already in use |
| * NAK_MAX_ORDINARY | 2 | Too many ordinary users |
| * NAK_MAX_PRIORITY | 3 | Too many priority users |
| * NAK_BAD_WORLD | 4 | World doesn't exist |
| * NAK_FATAL | 5 | Fatal error (e.g. can't instantiate user) |
| * NAK_BAD_PROTOCOL | 6 | Client running old or wrong protocol |
| * NAK_BAD_CLIENTSW | 7 | Client running old, or wrong version |
| * NAK_BAD_PASSWD | 8 | Wrong password for this user |
| * NAK_CALL_BILLING | 9 | Access denied, call billing |
| * NAK_TRY_SERVER | 10 | Try different server |

B.3. Beginning and Exiting Application

To begin an application, the Client must have already established a session via the SessionInitCommand. To begin an application, the Client sends an ApplicationInitCommand specifying the desired application:

```
C>S CLIENT APPINITCMD VAR_APPNAME "StarBright"
```

The Server will respond with an ack/nak to this command using the same technique discussed under session initialization.

B.4. Launching an Outside Application

The Server may tell the Client to launch an outside application by sending the LaunchAppCommand to the Protocol Object. For example:

```
S>C PO LAUNCHAPPCMD "Proshare"
```

WHAT IS CLAIMED IS:

1 1. An apparatus for interaction between a
2 plurality of users in a three-dimensional, computer-generated
3 graphical space, comprising:
4 a plurality of client processes, wherein each client
5 process is executed on a digital computer distinct from the
6 digital computers executing others of the plurality of client
7 processes;
8 a central server process, executed by a server
9 computer;
10 a network coupling the server computer to the
11 digital computers which execute the plurality of client
12 processes, thereby coupling the plurality of client processes
13 with the central server process;
14 a plurality of user objects, executed as
15 subprocesses of the central server process, wherein each of
16 the plurality of user objects is associated with a user in the
17 plurality of users;
18 an environment database, accessible by each client
19 process;
20 means for communicating a position of a particular
21 user in the three-dimensional, computer-generated graphical
22 space from the particular user's client process to the other
23 client processes via the central server process, the means for
24 communicating programmed according to a protocol;
25 means, on a digital computer executing the
26 particular user's client process, for receiving positions of
27 the users of the other client processes according to the
28 protocol via the central server process;
29 and means, on the digital computer executing the
30 particular user's client process, for rendering a
31 three-dimensional view from a viewpoint of the location of the
32 particular user, the rendered view including at least one
33 object from the environment database and, when other users are
34 at locations viewable from the rendered viewpoint, including
35 those other viewable users.

1 2. The apparatus of claim 1, wherein the
2 environment database comprises a single central environment
3 database.

1 3. The apparatus of claim 1, wherein the
2 environment database comprises one copy of the environment
3 data at each of the plurality of client digital computers.

ABSTRACT OF THE DISCLOSURE
SCALABLE VIRTUAL WORLD CHAT CLIENT-SERVER SYSTEM

5

10

15

20

The present invention provides a highly scalable architecture for a three-dimensional graphical, multi-user, interactive virtual world system. In a preferred embodiment a plurality of users interact in the three-dimensional, computer-generated graphical space where each user executes a client process to view a virtual world from the perspective of that user. The virtual world shows avatars representing the other users who are neighbors of the user viewing the virtual word. In order that the view can be updated to reflect the motion of the remote user's avatars, motion information is transmitted to a central server process which provides positions updates to client processes for neighbors of the user at that client process. The client process also uses an environment database to determine which background objects to render as well as to limit the movement of the user's avatar.

10

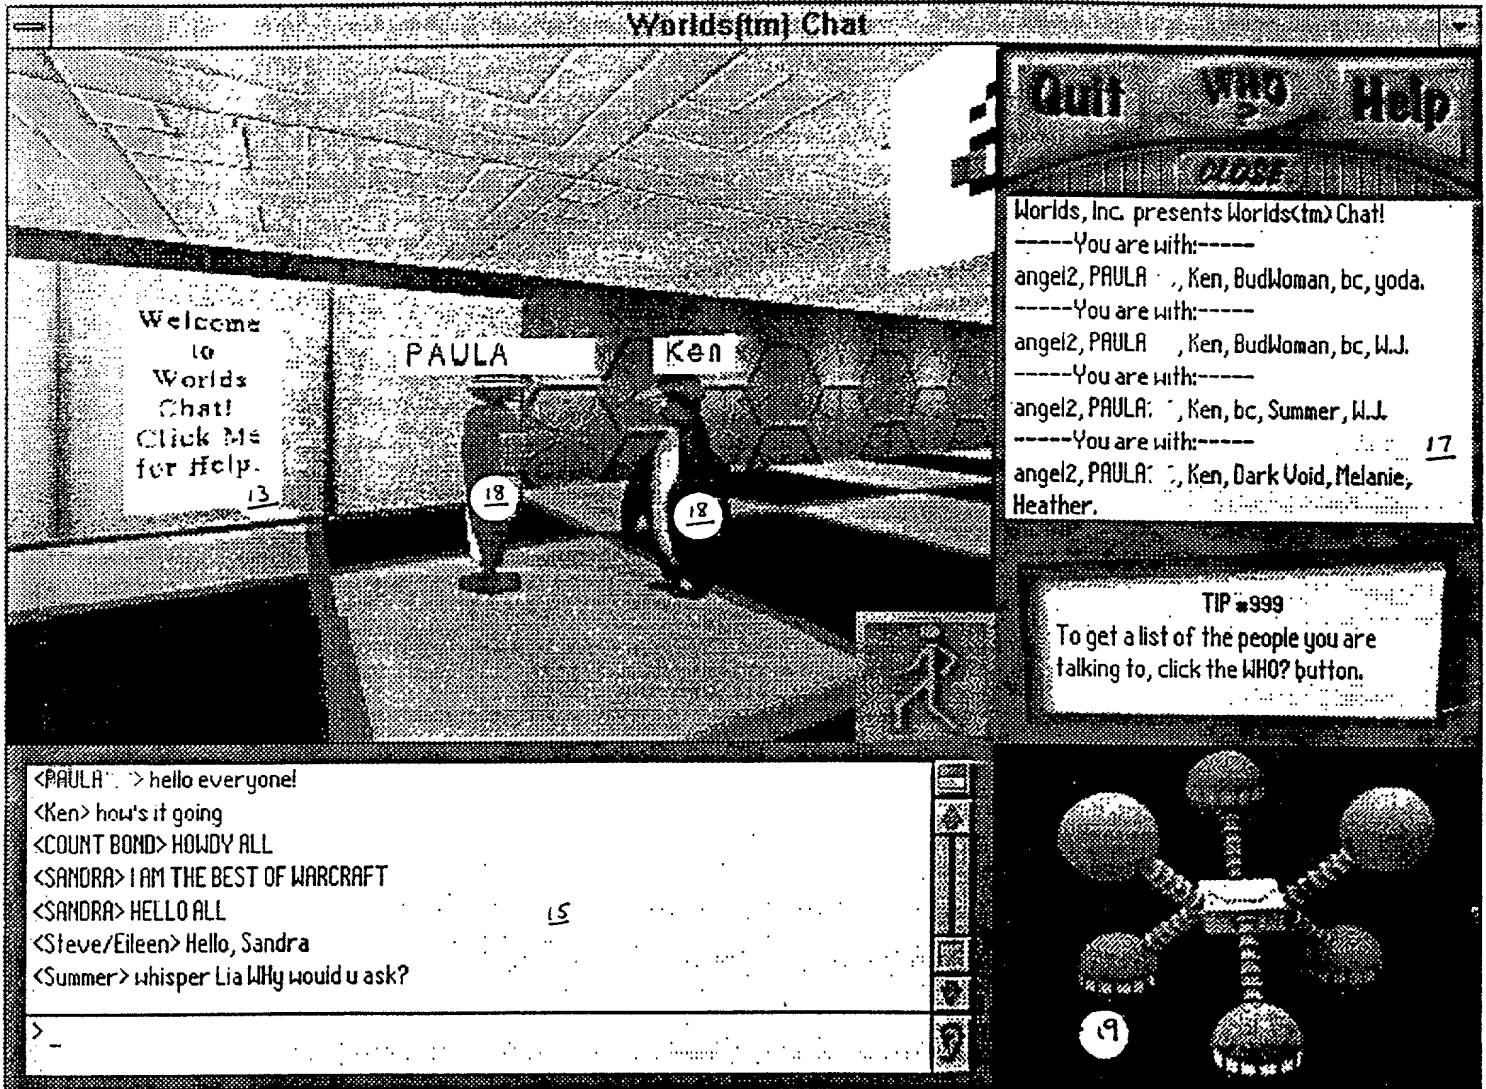


Fig. 1

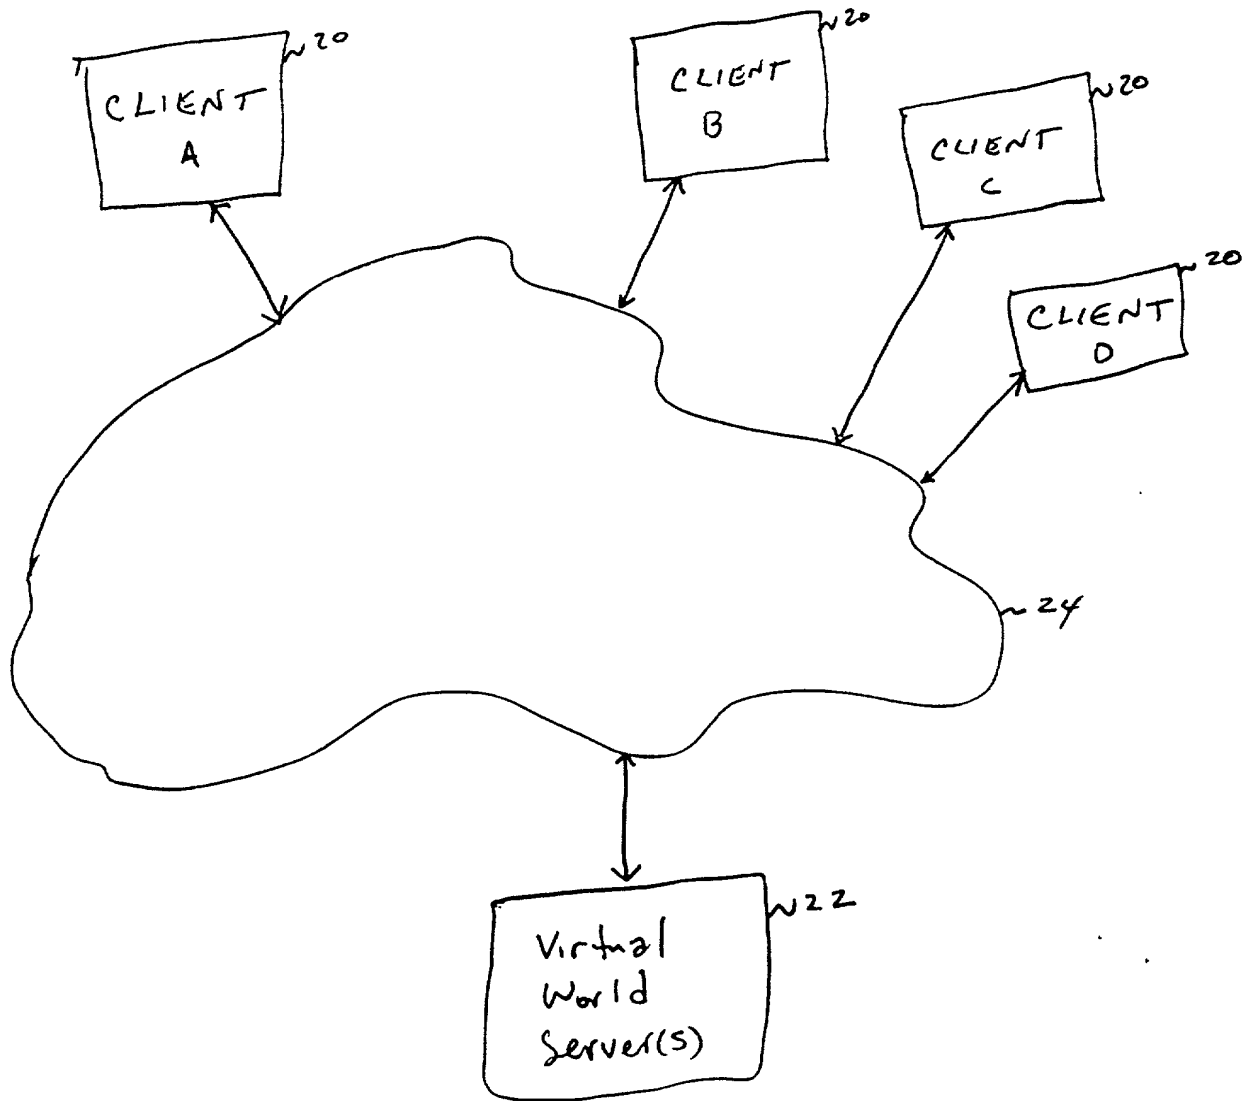


FIG. 2

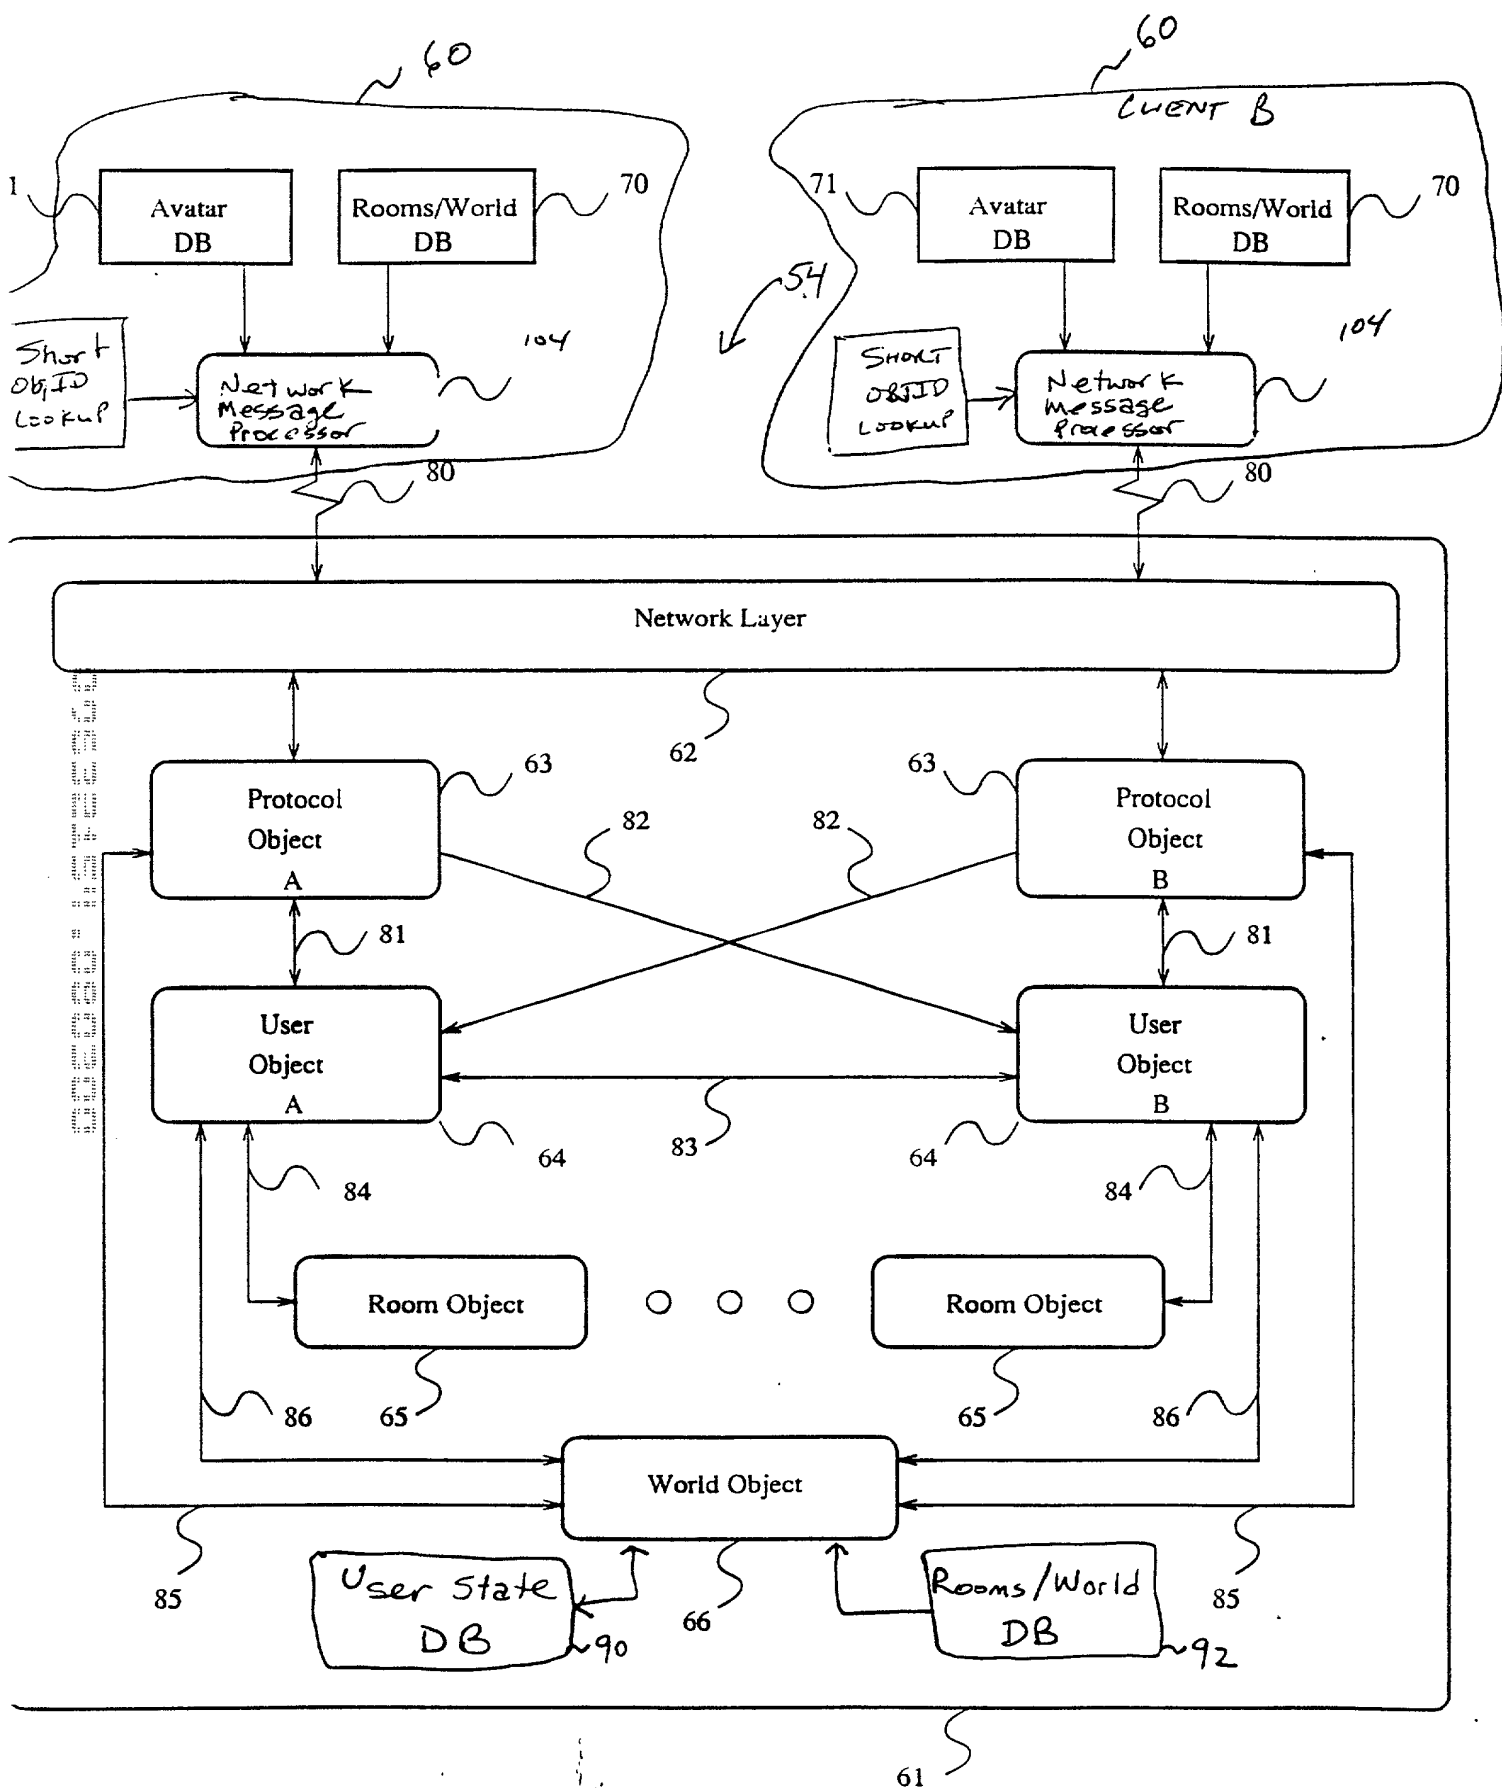


FIG. 3


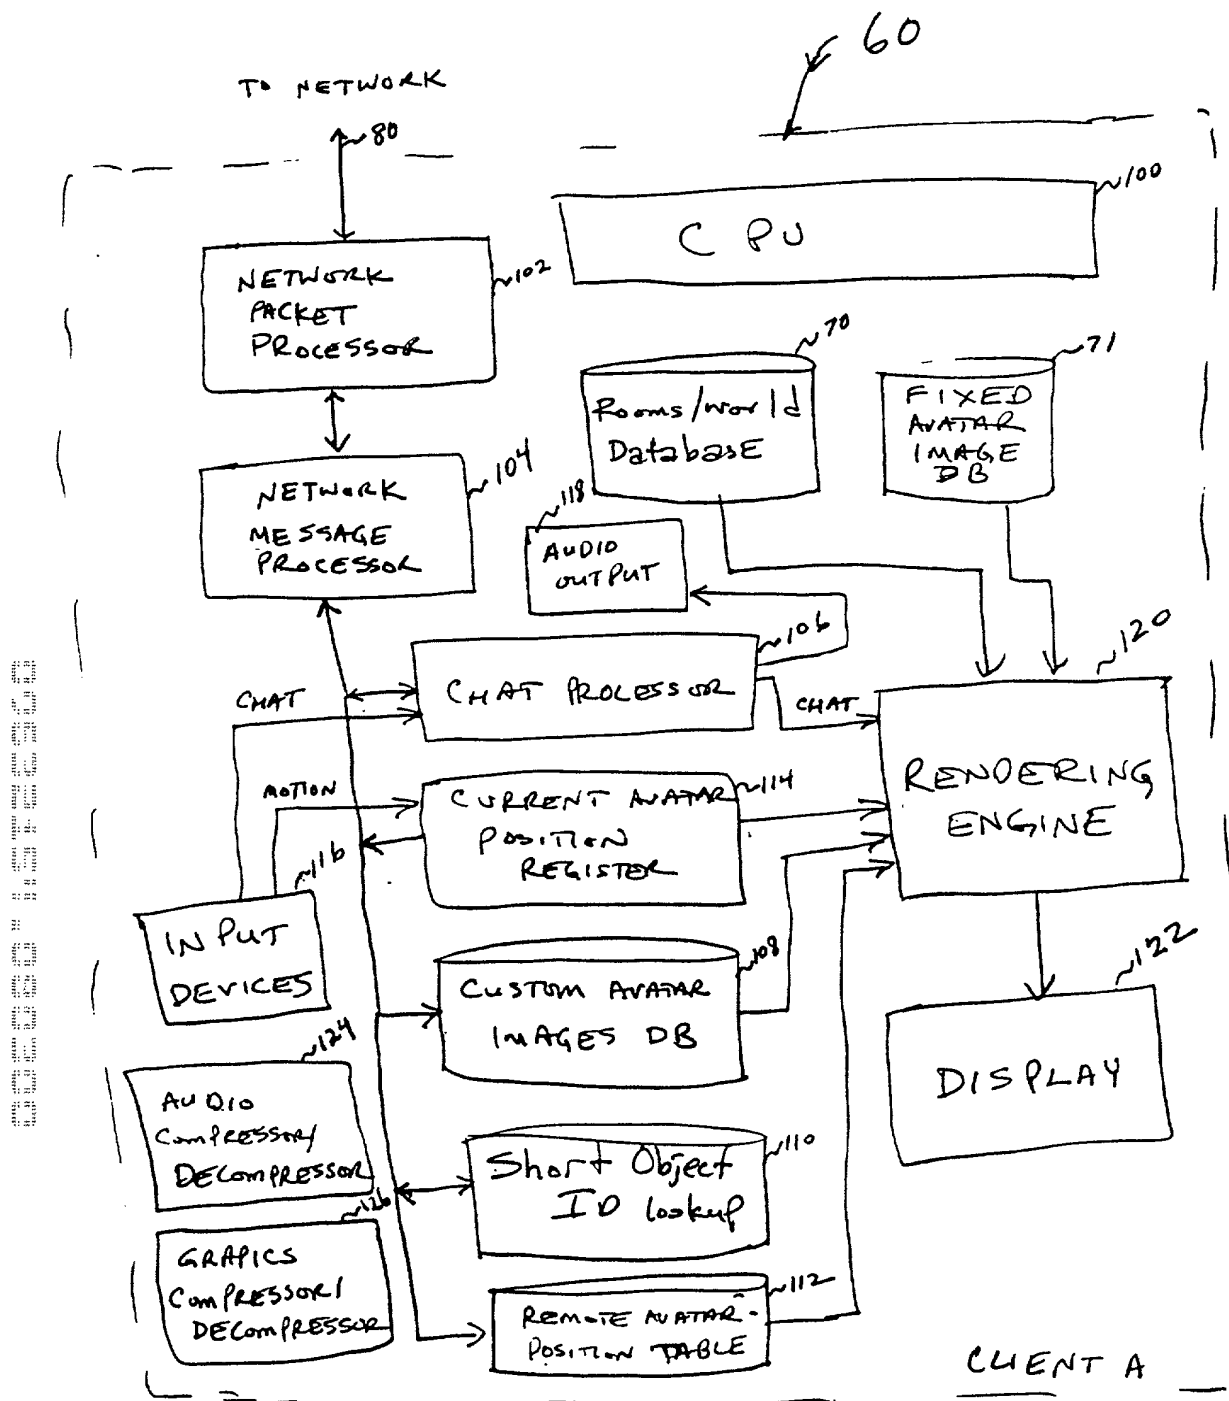


FIG. 4

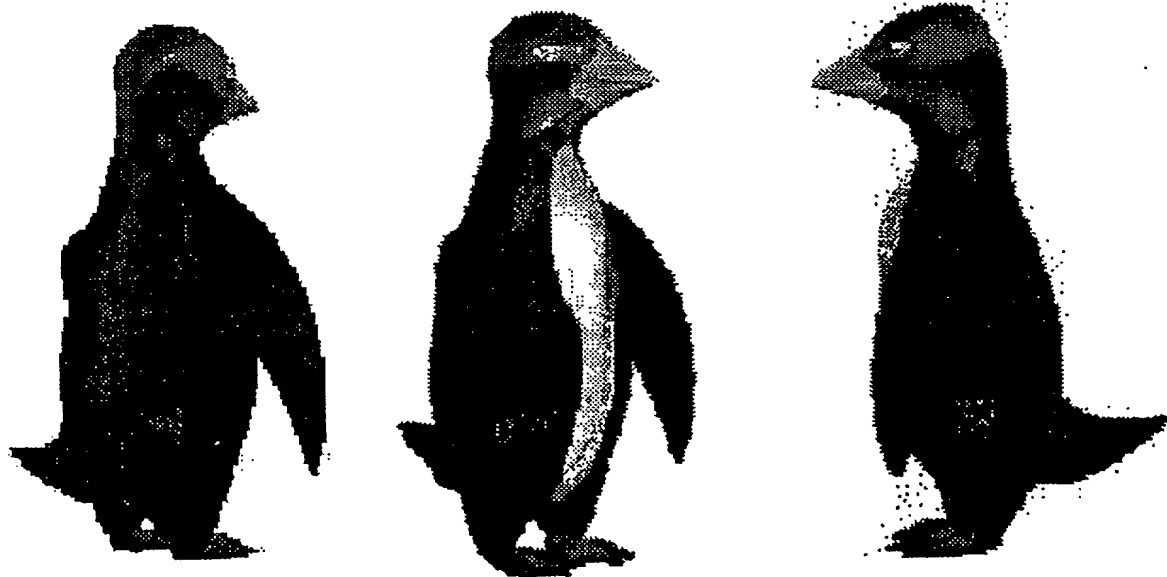

F16. 5

DECLARATION

As a below named inventor, I declare that

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SCALABLE VIRTUAL WORLD CHAT CLIENT-SERVER SYSTEM** the specification of which ___ is attached hereto or ___ was filed on ___ as Application No. ___ and was amended on ___ (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

| Country | Application No. | Date of Filing | Priority Claimed Under 35 USC 119 |
|---------|-----------------|----------------|-----------------------------------|
| | | | Yes ___ No ___ |
| | | | Yes ___ No ___ |

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:


| Application No. | Filing Date |
|-----------------|---------------|
| 60/020,296 | June 24, 1996 |
| | |

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

| Application No. | Date of Filing | Status |
|-----------------|----------------|--|
| | | ___ Patented ___ Pending ___ Abandoned |
| | | ___ Patented ___ Pending ___ Abandoned |

| | | | | |
|---------------------------|---|--------------------------|--------------------------------|----------------|
| Full Name of Inventor 1 | Last Name Leahy | First Name Dave | Middle Name or Initial | |
| Residence & Citizenship | City Oakland | State/Foreign Country CA | Country of Citizenship USA | |
| Post Office Address | Post Office Address 6056 Romany Road | City Oakland | State/Country CA | Zip Code 94618 |
| Full Name of Inventor 2 | Last Name Challenger | First Name Judith | Middle Name or Initial | |
| Residence & Citizenship | City Santa Cruz | State/Foreign Country CA | Country of Citizenship USA | |
| Post Office Address | Post Office Address 244 Northrop Place | City Santa Cruz | State/Country CA | Zip Code 95060 |
| Full Name of Inventor 3 | Last Name Adler | First Name B. | Middle Name or Initial Thomas | |
| Residence & Citizenship | City San Francisco | State/Foreign Country CA | Country of Citizenship USA | |
| Post Office Address | Post Office Address 510 Third Street, Suite 530 | City San Francisco | State/Country CA | Zip Code 94107 |
| Full Name of Inventor 4 | Last Name Ardon | First Name S. | Middle Name or Initial [Mitra] | |
| Residence and Citizenship | City San Francisco | State/Foreign Country CA | Country of Citizenship USA | |
| Post Office Address | Post Office Address 1056 Noe | City San Francisco | State/Country CA | Zip Code 94114 |

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.


| | | |
|---|---|--|
| Signature of Inventor 1 Dave Leahy | Signature of Inventor 2  Judith Challer | Signature of Inventor 3 B. Thomas Adler |
| Date | Date 11/8/96 | Date |
| Signature of Inventor 4 S. [Mitra] Ardon | | |
| Date | Date | Date |

(Page 2 of 2)

p:\017376\0005\01-decl

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

| | | |
|--|---|--|
| Signature of Inventor 1 Dave Leahy | Signature of Inventor 2 Judith Challenger | Signature of Inventor 3  B. Thomas Adler |
| Date | Date | Date 29-Oct-96 |
| Signature of Inventor 4 S. [Mitra] Ardon | | |
| Date | Date | Date |

(Page 2 of 2)

pc\017376\0005\001-decl

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

I further declare that all statements made herein of my own knowledge are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

| | | |
|--|---|---|
| Signature of Inventor 1 Dave Leahy <i>Dave Leahy</i> | Signature of Inventor 2 Judith Challinger | Signature of Inventor 3 B. Thomas Adler |
| Date <i>11/11/96</i> | Date | Date |
| Signature of Inventor 4 S. [Mitra] Ardon | | |
| Date | Date | Date |

(Page 2 of 2)

pt:017376/0005/r01-decl

Express Mail Label No. EM 530 837 312 US
Date of Deposit: November 12, 1996

Attorney Docket No. 17376-5

I hereby certify that this correspondence is being deposited
with the United States Postal Service "Express Mail Post
Office to Addressee" service under 37 CFR §1.10 addressed to:
Assistant Commissioner for Patents,
Washington, D.C. 20231, on November 12, 1996

By

P. Bell

PATENT
JC639 U.S. PRO
09/632154
08/03/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

| | | |
|-----------------------------------|---|--------------------------------|
| In re application of: |) | Examiner: TBA |
| |) | |
| Dave Leahy, et al. |) | Art Unit TBA |
| |) | |
| Serial No.: NEW |) | DECLARATION OF PHILIP H. |
| |) | ALBERT IN SUPPORT OF PETITION |
| Filed: November 12, 1996 |) | FOR FILING PATENT APPLICATION |
| |) | UNDER 37 CFR §1.47(b): |
| For: SCALABLE VIRTUAL WORLD CHAT) |) | APPLICATION BY ASSIGNEE WHEN A |
| CLIENT-SERVER SYSTEM |) | JOINT INVENTOR REFUSES TO SIGN |
| |) | OR CANNOT BE FOUND |

Box: Patent Application
Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

I, Philip H. Albert, declare as follows.

1. I am an associate in the law firm of Townsend and Townsend and Crew LLP and am one of the attorneys of record in the subject application.

2. On November 7, 1996 and times before, I met personally and by telephone with Mr. Ardon requesting that he review the above-captioned patent application and sign a Rule 63 declaration provided to him.

3. Mr. Ardon refused to sign the declaration stating his belief that the claims did not recite patentable subject matter.

4. After explaining to him the legal test for novelty and non-obviousness, I requested that Mr. Ardon provide an example of prior art which would render the claimed invention unpatentable, but he could not cite any.

5. Mr. Ardon is currently employed either as a consultant or an employee for one of Worlds' competitors. Worlds is concerned that Mr. Ardon may be basing his refusal to sign on a desire to prevent Worlds from obtaining a patent on an invention his current employer may wish to exploit.

6. I offered Mr. Ardon the opportunity to provide me with prior art references which I would submit in an Information Disclosure Statement, but he indicated that he would not take the time to search for prior art.

7. To my knowledge, Mr. Ardon does not dispute that he was the developer of parts of the subject matter disclosed in the application and of parts of the claimed subject matter, only disputing the patentability of the claimed subject matter.

8. In discussions about the patentability of the claims, I asked Mr. Ardon to cite prior art which might cause the claims to be unpatentable. He cited a number of existing systems, such as "Habitat" developed by Compuserve, "Doom" developed by id Software, the DIVE system used in Switzerland, and systems called "AMBER" and "DESCENT." Mr. Ardon may have mentioned other systems, but I do not recall any beyond those in my notes.

9. When I asked Mr. Ardon about specific limitations of the systems, he indicated that many of them were proprietary and he did not know about their inner workings.

The undersigned declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may

Richard M. Peters, Jr, et al.
Serial No. 08/263,646
Page 3

PATENT


jeopardize the validity of the application or any patent issuing thereon.

Respectfully submitted

Date:

12 Nov 96

By



Philip H. Albert

Reg. No. 35,819

TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, CA 94111-3834
Telephone: (415) 576-0200
Fax: (415) 576-0300